


## 730008



Full bore painted flanged ball valve, PN16 in cast iron ENGJL-250, according to EN 558 basic series 14 (DN 200 basic series 27).

EN-GJL 250 Drilled ISO 5211.

### Technical specifications

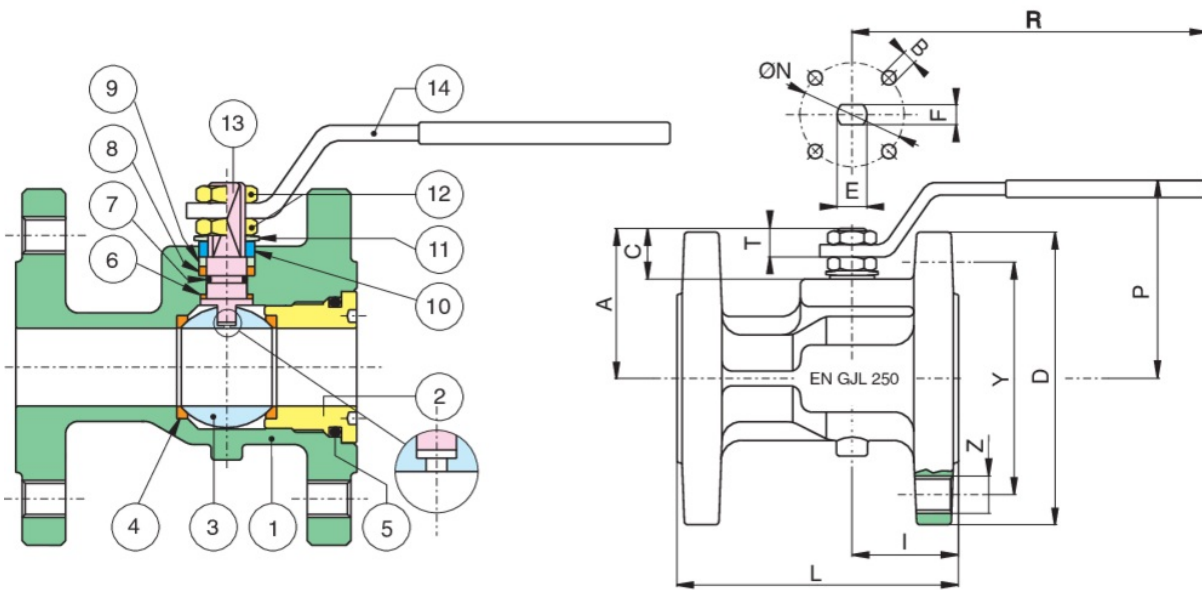

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	EN-GJL 250	1
2	END CONNECTION	ASTM A105 + Z/P	1
3	BALL	A351-CF8/A479-TP304	1
4	BALL SEAT	PTFE	2
5	O-RING	FKM (VITON)	1
6	THRUST WASHER	TFM	1
7	O-RING	FKM (VITON)	1
8	STEM SEAT	PTFE	1
9	PACKING GLAND	A37+Z/P	1
10	END STOP	INOX AISI 430 (1-4"-2") A37 Z/P (2"1-2-4")	2-1
11	SPRING WASHER	51CrV4+Z/P	2
12	NUT	6S+Z/P	2-1
13	STEM	A479-TP304	1
14	HANDLE	A37+Z/P	1

SIZE	DN	CODE	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	KV	PN	KG
1"	25	73000406	115	85	4xM12	44,5	125	174	80	59	19,5	11,5	12	8	42	4xM5	64,5	16	3,10
1"1/4	32	73000407	140	100	4xM16	51,5	130	174	84	64	18	10	12	8	42	4xM5	103,8	16	4,80
1"1/2	40	73000408	150	110	4xM16	49	140	250	103	78	24	13	16	10	50	4xM6	174	16	6,10
2"	50	73000410	165	125	4xM16	52	150	250	110	85	24	13	16	10	50	4xM6	301,3	16	7,80
2"1/2	65	73000412	185	145	4xM16	65	170	321	126	103	28	18	20	14	70	4xM8	545,7	16	11,40

## Certifications

SIL 3

SIL 3



TUV



ATEX FIRE-SAFE (On request)