


## 707600

Fully welded painted ASTM A105/WCB reduced bore floating ball valve for natural gas, elongated stem for installation underground level, BW ends, in accordance to UNI 9734 and EN 13774.



### Technical specifications

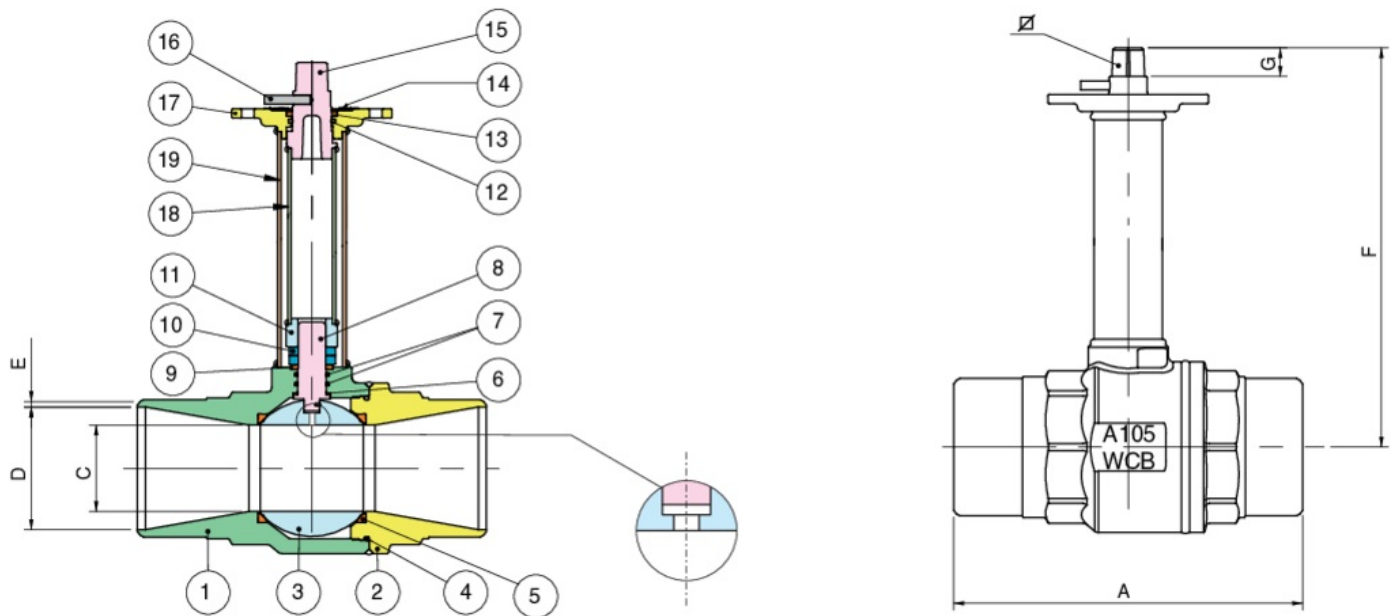

Temperature range: -10°C +60°C.

| POSITION | PART NAME               | MATERIAL                | N.° PIECES |
|----------|-------------------------|-------------------------|------------|
| 1        | BODY                    | ASTM A105-WCB           | 1          |
| 2        | END CONNECTION          | ASTM A105-WCB           | 1          |
| 3        | BALL                    | A479-TP304              | 1          |
| 4        | O-RING                  | NBR                     | 1          |
| 5        | BALL SEAT               | PTFE                    | 2          |
| 6        | SEAT                    | PTFE                    | 1          |
| 7        | O-RING                  | FKM                     | 2          |
| 8        | STEM                    | A479-TP304              | 1          |
| 9        | PACKING GLAND           | POM                     | 1          |
| 10       | NUT                     | CARBON STEEL            | 2          |
| 11       | STEM TRASMISSION        | ASTM A105               | 1          |
| 12       | O-RING                  | FKM                     | 1          |
| 13       | SEAT                    | PTFE                    | 1          |
| 14       | LABEL                   | PLACA DE IDENTIFICACION | 1          |
| 15       | OPERATION SQUARE        | A216-WCB                | 1          |
| 16       | OPEN/CLOSED INDICATION  | CARBON STEEL            | 1          |
| 17       | CAP                     | A216-WCB                | 1          |
| 18       | EXTERNAL STEM EXTENSION | CARBON STEEL            | 1          |
| 19       | INTERNAL STEM EXTENSION | CARBON STEEL            | 1          |

| SIZE     | CODE     | A   | C   | D     | E   | F 707400 | F 707600 | F 707800 | G  |         | KV     | PN | KG    |
|----------|----------|-----|-----|-------|-----|----------|----------|----------|----|---------|--------|----|-------|
| 4" X 3"  | 70760064 | 305 | 76  | 107,9 | 4,8 | 400      | 600      | 800      | 25 | 22 x 22 | 872,5  | 20 | 22,50 |
| 5" X 4"  | 70760066 | 380 | 102 | 131,5 | 5,4 | 400      | 600      | 800      | 25 | 22 x 22 | 1363,3 | 20 | 36,00 |
| 6" X 4"  | 70760074 | 457 | 102 | 159,3 | 5,1 | 400      | 600      | 800      | 25 | 22 x 22 | 1363,3 | 20 | 48,50 |
| 8" X 6** | 70760081 | 521 | 150 | 209,1 | 7,5 | 400      | 600      | 800      | 30 | 36 x 27 | 3671,1 | 20 | 90,00 |

Connection for gear operator.

**Epoxy painting 100 micron thick.**