

WAFER PN16

720750




Full bore flanged ball valve PN16, stainless steel AISI 304-CF8, Antistatic Device, suitable for solvents.

FOR SOLVENTS

V-Ball option



Technical specifications

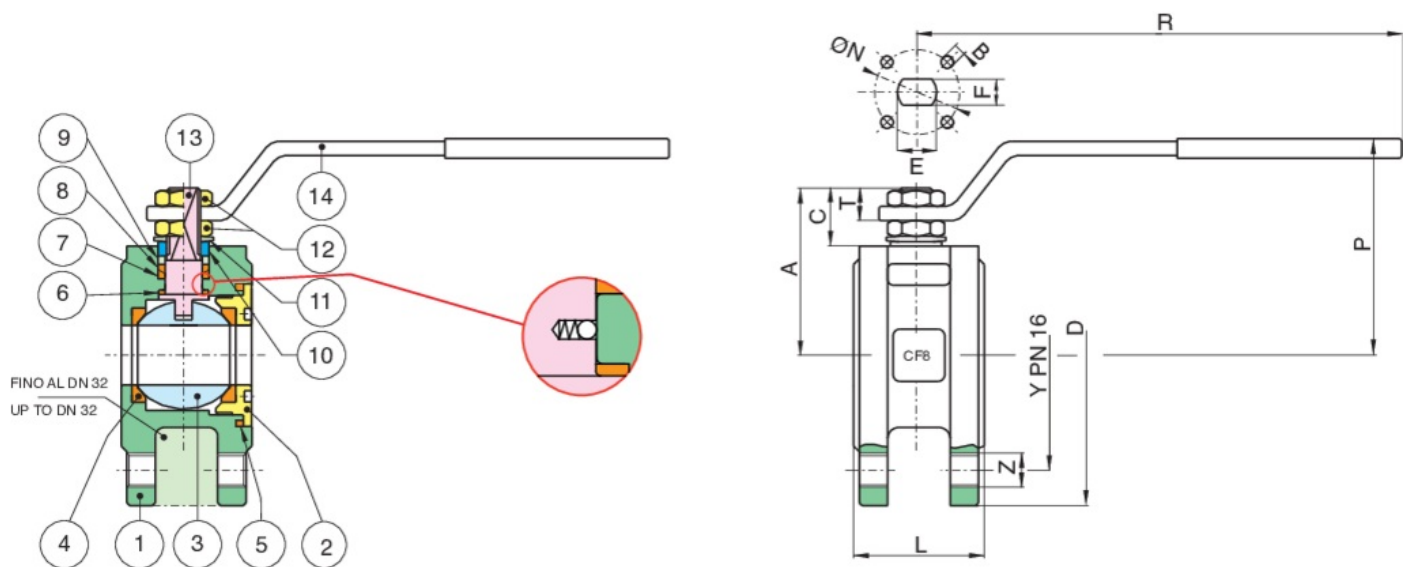

Temperature range: -20° +160°

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	A351-CF8/A182-F304	1
2	END CONNECTION	A351-CF8/A182-F304	1
3	BALL	A351-CF8/A479-TP304	1
4	BALL SEAT	PTFE	2
5	BODY SEAT	PTFE	1
6	THRUST WASHER	PTFE	1
7	STEM SEAT	PTFE	1
8	STEM SEAT	PTFE	1
9	PACKING GLAND	CARBON STEEL	1
10	END STOP	INOX AISI 430 (DN15-DN50) CARBON STEEL (DN65-DN80)	2
11	SPRING WASHER	CARBON STEEL	2
12	NUT	CARBON STEEL	1
13	STEM	A479-TP316/316L	1
14	HANDLE	CARBON STEEL	1

SIZE	DN	CODE	D	Y	Z	L	R	P	A	C	T	E	F	ØN	B	KV	PN	KG
1/2"	15	72075004	90	65	4xM12	35	131	65	47	15,5	9	10	7	32	4xM5	19,2	16	1,30
3/4"	20	72075005	100	75	4xM12	40	131	69	51,5	15,5	9	10	7	32	4xM5	35	16	1,90
1"	25	72075006	115	85	4xM12	46	174	80	61	17	11	12	8	42	4xM5	64,5	16	2,20
1"1/4	32	72075007	140	100	4xM16	54	174	84	64,5	15	11	12	8	42	4xM5	103,8	16	3,30
1"1/2	40	72075008	150	110	4xM16	63,5	250	102	78	24,5	13	16	10	50	4xM6	174	16	4,20
2"	50	72075010	165	125	4xM16	82	250	111	87	25	13	16	10	50	4xM6	301,3	16	6,10
2"1/2	65	72075012	185	145	4xM16	103	321	128	104,5	25	18	20	14	70	4xM8	545,7	16	10,00
3"	80	72075014	200	160	8xM16	122	321	138	115	28,5	18	20	14	70	4xM8	872,5	16	13,50

Certifications



ATEX

SIL 3

SIL 3