





68R415 SUPER DUPLEX

Flanged ANSI 600 API STANDARD 608 super duplex ball valve, full bore, ASME B16.10 face to face dimension, Fire Safe, Antistatic Device.



Technical specifications

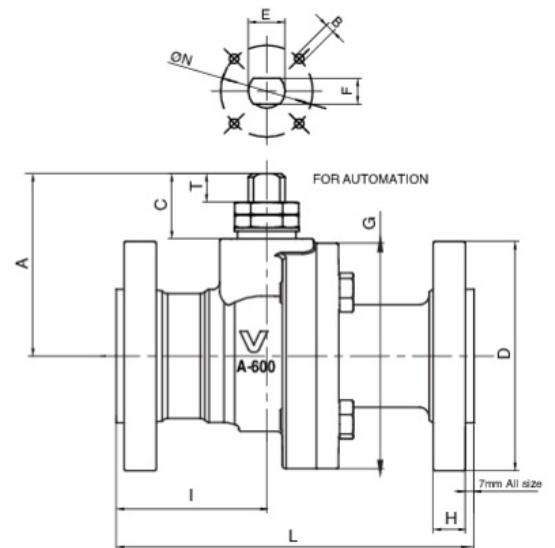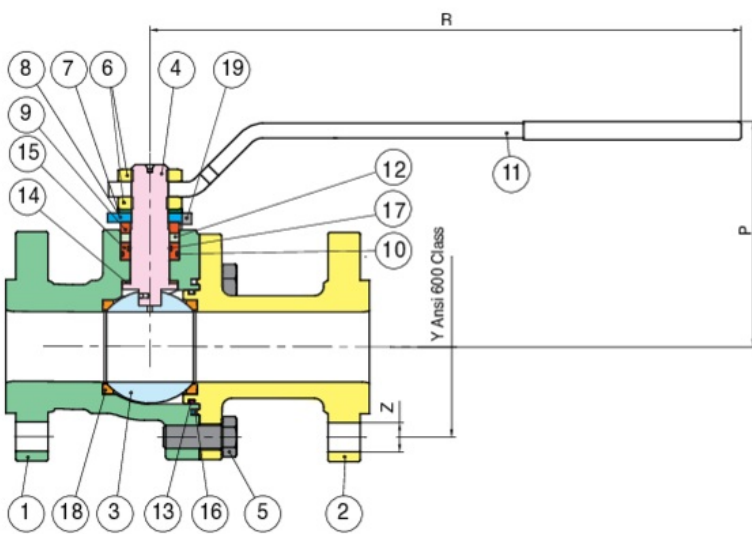

Temperature range: -20°C +180°C.

Vacuum: 10^{-3} torr.

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	ASTM A995-GR. 6	1
2	END CONNECTION	ASTM A995-GR. 6	1
3	BALL	UNS S32760	1
4	STEM	UNS S32760	1
5	SCREW	A193 B8 Cl.2	4-6
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	AISI 316	1
9	BUSH	A479-TP316L	1
10	O-RING	FKM	1
11	HANDLE	AISI 316	1
12	STEM SEAL	GRAPHITE	1
13	O-RING	FKM	1
14	THRUST WASHER	RPTFE	1
15	O-RING BUSH	UNS S32760	1
16	BODY SEAT	GRAPHITE	1
17	O-RING	FKM	1
18	BALL SEAT	RPTFE	2
19	SCREW	A2-70	2

SIZE	DN	CODE	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	KV	PN	KG
1/2"	15	68R41504	95	66,7	4xØ16	14,3	69	165	85	95	174	54	21,5	6,8	M12	8	42-F04	M5	19,2	100	3,60
3/4"	20	68R41505	115	82,6	4xØ19	15,9	78,5	190	95	99	174	58	20,5	6,8	M12	8	42-F04	M5	35	100	5,10
1"	25	68R41506	125	88,9	4xØ19	17,5	97,5	216	105	100	250	75	29	10	M16	10	50-F05	M6	64,5	100	7,20
1 1/2"	40	68R41508	155	114,3	4xØ22	22,3	130	241	128	123	321	99,7	35,5	15,5	M20	14	50-F05	M6	174	100	13,20
2"	50	68R41510	165	127	8xØ19	25,4	119,5	292	144	133	321	109	36,5	16,5	M20	14	50-F05	M6	301,3	100	17,40

Certifications



TUV SIL 3



FIRE-SAFE Acc. EN ISO
10497/API 607



F.E. TESTED ISO15848-1

Spare Parts

● SEATS

Code	Material	Size
RI6115	PTFE CARBOGRAFITE - CARBON FILLED PTFE	15
RI6116	PTFE CARBOGRAFITE - CARBON FILLED PTFE	20
RI6117	PTFE CARBOGRAFITE - CARBON FILLED PTFE	25
RI6118	PTFE CARBOGRAFITE - CARBON FILLED PTFE	40
RI6119	PTFE CARBOGRAFITE - CARBON FILLED PTFE	50