

WAFER PN16

720601




Full bore flanged ball valve PN16, metric thread stainless steel A351-CF8 and A351-CF8M.

A351-CF3M ANSI 150 metric.



Technical specifications

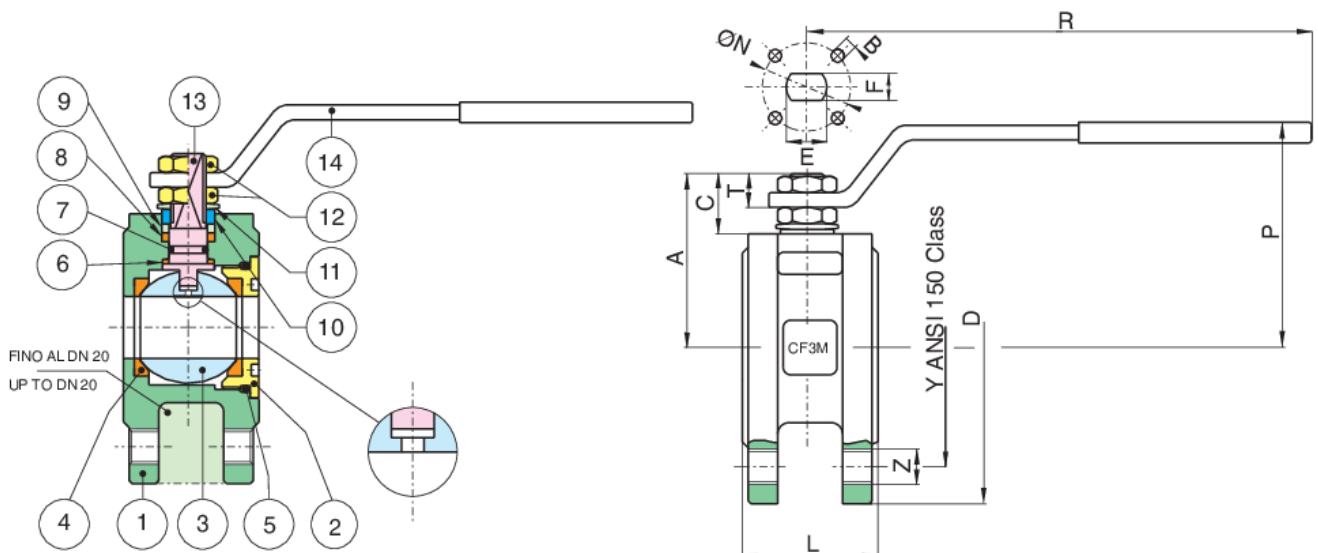

| POSITION | PART NAME | MATERIAL | N.° PIECES |
|----------|-------------------|---|------------|
| 1 | BODY | A351-CF3M-A479-Tp316L | 1 |
| 2 | END CONNECTION | A479-TP316L | 1 |
| 3 | BALL | A351-CF3M-A479-Tp316L | 1 |
| 4 | BALL SEAT | PTFE | 2 |
| 5 | O-RING | FKM (VITON) | 1 |
| 6 | ANTIFRICTION RING | TFM | 1 |
| 7 | O-RING | FKM (VITON) | 1 |
| 8 | STEM SEAT | PTFE | 1 |
| 9 | PACKING GLAND | A37+Z/P | 1 |
| 10 | 90° STOP | AISI 430 (DN15-DN50) A37+Z-P (DN65-DN200) | 2-1 |
| 11 | SPRING WASHER | 51CrV4+Z/P | 2 |
| 12 | NUT | A2-70 | 2 |
| 13 | STEM | A479-TP316L | 1 |
| 14 | HANDLE | A37+Z/P | 1 |

| SIZE | DN | CODE | D | Y | Z | L | R | P | A | C | T | E | F | ØN | B | KV | PN | KG |
|-------|----|----------|-----|-------|-------|------|-----|-----|-------|------|----|----|----|----|------|-------|----|-------|
| 1/2" | 15 | 72060104 | 90 | 60,5 | 4xM14 | 35 | 131 | 65 | 47 | 15,5 | 9 | 10 | 7 | 32 | 4xM5 | 19,2 | 20 | 1,30 |
| 1" | 25 | 72060106 | 110 | 79,2 | 4xM14 | 46 | 174 | 80 | 61 | 17 | 11 | 12 | 8 | 42 | 4xM5 | 64,5 | 20 | 2,2 |
| 1"1/4 | 32 | 72060107 | 118 | 88,9 | 4xM14 | 54 | 174 | 84 | 64,5 | 15 | 11 | 12 | 8 | 42 | 4xM5 | 103,8 | 20 | 3,7 |
| 1"1/2 | 40 | 72060108 | 130 | 98,6 | 4xM14 | 63,5 | 250 | 102 | 78 | 24,5 | 13 | 16 | 10 | 50 | 4xM6 | 174 | 20 | 3,70 |
| 2"1/2 | 65 | 72060112 | 178 | 139,7 | 4xM16 | 103 | 321 | 128 | 104,5 | 25 | 18 | 20 | 14 | 70 | 4xM8 | 545,7 | 20 | 10,00 |
| 3" | 80 | 72060114 | 190 | 152,4 | 4xM16 | 122 | 321 | 138 | 115 | 28,5 | 18 | 20 | 14 | 70 | 4xM8 | 872,5 | 20 | 12,80 |

Certifications

F.E. TESTED
ISO15848-1

F.E. TESTED ISO15848-1



TUV

SIL 3

SIL 3



ATEX FIRE-SAFE (On request)