

710011



Three-piece full bore A351-CF8M ball valve: threaded F/F, butt/ socket-welded ISO PAD 5211.


BW integral seats stainless steel.

V-Ball option



Low temperature design
-40°C ON DEMAND

Technical specifications

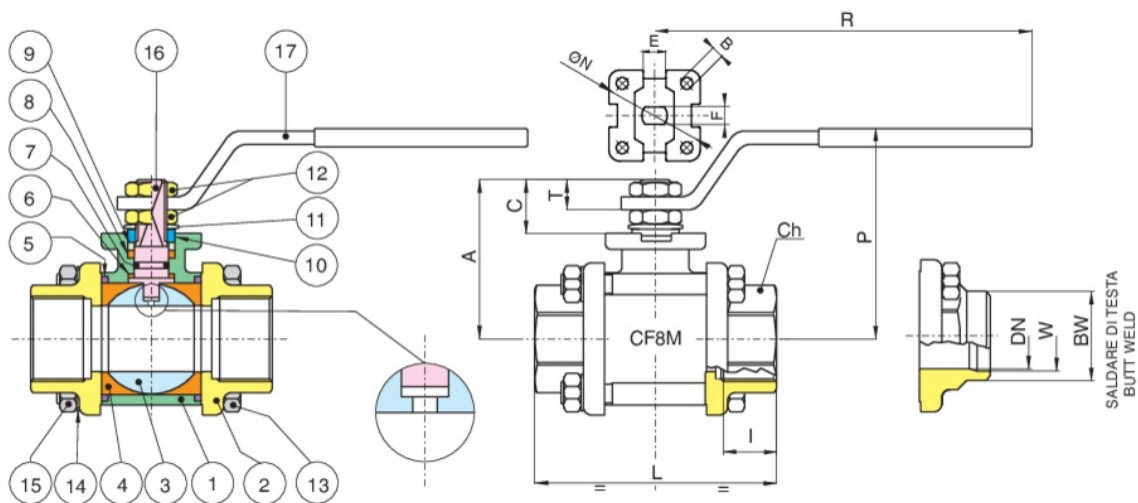

Stainless steel: Temperature range: -20°C +160°C.

| POSITION | PART NAME | MATERIAL | N.° PIECES |
|----------|-------------------|---|------------|
| 1 | BODY | A351-CF8M | 1 |
| 2 | END CONNECTION | A351-CF8M | 2 |
| 3 | BALL | A479-TP316/A351-CF8M | 1 |
| 4 | BALL SEAT | PTFE | 2 |
| 5 | BODY SEAT | PTFE | 2 |
| 6 | ANTIFRICTION RING | TFM | 1 |
| 7 | O-RING | FKM (VITON) | 1 |
| 8 | STEM SEAT | PTFE | 1 |
| 9 | PACKING GLAND | A479-TP316 (1/4"-2") - A37+Z-P (2"1/2-4") | 1 |
| 10 | 90° STOP | INOX AISI 430 (1-4"-2") A37 Z/P (2"1-2-4") | 2 |
| 11 | SPRING WASHER | 51CrV4+Z/P (2"1/2-4") | 2 |
| 12 | NUT | A2-70 (1/4"-2") - 6S + Z/P (2"1/2-4") | 2 |
| 13 | SCREW | A2-70 +Z/P (1/4"-2") - 8.8 + Z/P (2"1/2-4") | 4 |
| 14 | WASHER | INOX AISI 304 (1/4"-2") C60S+Z/P (2"1/2-4") | 4 |
| 15 | NUT | A2-70 (1-4"-2") - A37 + Z-P (2"1-2-4") | 4 |
| 16 | STEM | A479-TP316 | 1 |
| 17 | HANDLE | INOX AISI 430 (1-4"-2") A37 Z/P (2"1-2-4") | 1 |

| SIZE | DN | CODE | BOX | BW | W | L | CH | R | P | A | C | E | F | N | B | KV | PN | KG | T |
|-------|-----|----------|-----|-------|--------|-----|-------|-----|-----|-----|------|----|----|-----|-----|-------|----|-------|------|
| 3/8" | 10 | 71001103 | 10 | 17,1 | 12,48 | 57 | OT.22 | 110 | 50 | 35 | 13,5 | 8 | 5 | - | - | 8,5 | 64 | 0,27 | 9 |
| 1/2" | 15 | 71001104 | 6 | 21,4 | 15,76 | 65 | OT.27 | 131 | 64 | 47 | 15 | 10 | 7 | 36 | 6 | 19,2 | 64 | 0,50 | 10 |
| 3/4" | 20 | 71001105 | 5 | 26,7 | 20,96 | 76 | OT.32 | 131 | 68 | 52 | 16 | 10 | 7 | 42 | 6 | 35 | 40 | 0,75 | 10 |
| 1" | 25 | 71001106 | 2 | 33,4 | 26,64 | 92 | OT.41 | 174 | 79 | 60 | 19,5 | 12 | 8 | 42 | 6 | 64,5 | 40 | 1,30 | 12,5 |
| 1"1/4 | 32 | 71001107 | 4 | 42,2 | 35,08 | 106 | OT.50 | 174 | 83 | 64 | 19,5 | 12 | 8 | 42 | 6 | 103,8 | 25 | 1,80 | 12,5 |
| 1"1/2 | 40 | 71001108 | 2 | 48,3 | 40,94 | 116 | OT,55 | 250 | 100 | 79 | 24 | 16 | 10 | 50 | 6,5 | 174 | 25 | 2,70 | 16,5 |
| 2" | 50 | 71001110 | 2 | 60,3 | 52,48 | 136 | OT.70 | 250 | 107 | 86 | 24 | 16 | 10 | 50 | 6,5 | 301,3 | 25 | 4,10 | 16,5 |
| 2"1/2 | 65 | 71001112 | 1 | 73 | 62,68 | 153 | Ø90 | 321 | 126 | 103 | 28 | 20 | 14 | 70 | M8 | 545,7 | 16 | 8,15 | 18 |
| 3" | 80 | 71001114 | 1 | 88,9 | 77,92 | 180 | Ø105 | 321 | 137 | 114 | 28 | 20 | 14 | 70 | M8 | 872,5 | 16 | 12,80 | 18 |
| 4" | 100 | 71001118 | 1 | 114,3 | 102,26 | 217 | Ø130 | 381 | 156 | 137 | 34,5 | 24 | 18 | 102 | M10 | 1363 | 16 | 22,00 | 22 |

Certifications



TUV



ATEX (On request)

SIL 3

SIL 3